



Technical Documentation

ROLLER CONVEYORS

Each serial number is unique to that specific conveyor and provides mk North America with complete order details.

The conveyor serial number is located on the frame at the drive end of the conveyor. See section 2 for more details.

1	General Information	3
2	Serial Number Label	4
3	Conveyor Description	5
4	Warranty Information	6
5	Safety Requirements	7
6	Wear Items & Maintenance By Conveyor Types	9
7	Conveyor Maintenance - Tensioning & Greasing Of Drive Chain (RBT-P 2255)	16
8	Contact Information	18

1 GENERAL INFORMATION

1.1 Foreword

Congratulations on purchasing a conveyor from mk North America, Inc., a leading manufacturer of quality low profile conveyors. Our more than 30 years experience in material handling allows us to offer robust solutions with long life and reliable operation. We strive to make the best products in the industry even better and we are committed to making sure our customers get top notch support before, during, and after each and every sale.

1.2 The importance of reading your manual

Inside this manual you will find the instructions on how to set up and maintain your mk conveyor properly, as well as maximize its performance. Please take the time to read this manual and familiarize yourself with these set up and maintenance instructions. These instructions will help assure a long product life that requires a minimum amount of service and keeps your conveyor working at its maximum capacity.

1.3 If you need assistance

If you need assistance there are a variety of ways to get it. You can contact our customer service team Monday through Friday, 8am-5pm (Eastern Time) at (860) 769-5500. You can also visit our website for additional information and technical documentation at www.mknorthamerica.com. In addition, your local representative can provide support in many instances.

1.4 When your shipment arrives

- 1) Check your shipment
 - a) If you have not already done so, visually inspect the shipping crate/container for any damage caused during shipment.
 - b) Carefully unpack the crate/container making sure to inspect the components for damage that may have occurred inside the packaging materials.
 - c) If you find any damage, please contact the carrier and mk North America, Inc.
 - d) Lastly, check the contents against the packing slip provided by mk for any discrepancies. If you should find any, please contact mk North America, Inc.
- 2) Locate your ordered items
 - a) Each mk conveyor will ship in its own custom built container, carefully packaged in the most economical way.
 - b) Review the packing slip against your Purchase Order.

Technical Documentation ROLLER CONVEYORS



2 SERIAL NUMBER LABEL

• The conveyor's serial number is located on the frame at the drive end of the conveyor.



Type:

This description refers to the type of unit that is associated with the particular serial number. The type should NOT be substituted for the serial number when inquiring.

Serial #:

This number is unique to this item. With this number we can access all of the original order details.

Drawing #:

This number, if applicable, refers to the specific drawing that was created for this unit.

Date:

This is the date that the unit was scheduled to ship.

CO#:


This is the customer order number in which this unit was built. This is an mk North America, Inc. internal number. This number is also referenced on any related invoices, etc.

Scan for Documentation:

Scanning this QR code will bring you to a webpage specific for the conveyor on this order. From here you can access drawings and spare parts.

3 CONVEYOR DESCRIPTION

3.1 Explaining the conveyor **TYPE**.

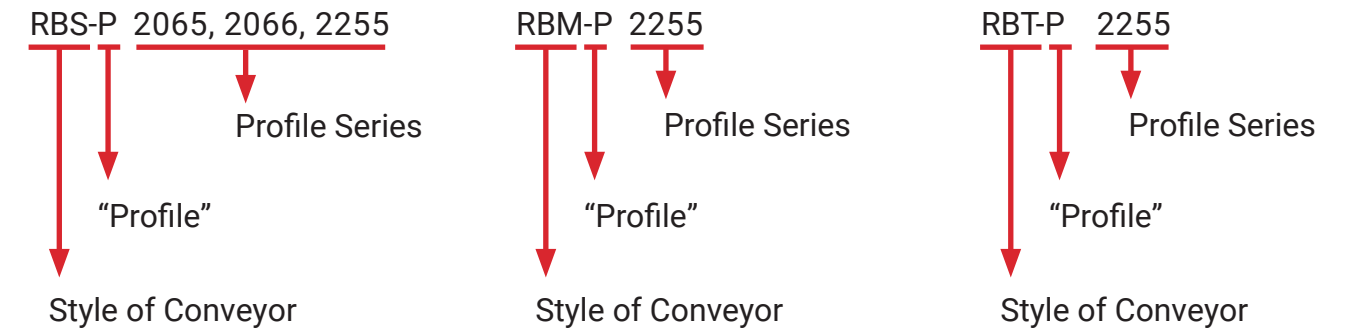

Style of Conveyor

- DGF (Doppel-Gurt Foerderer) Dual-Belt Conveyor
- GUF (Gurt Foerderer) Belt Conveyor
- KFG (Knickfoerderer Gurt) Bent "Gooseneck" Belt Conveyor
- KFM (Knickförder Modular) Bent "Gooseneck" Plastic Modular Belt Conveyor
- KGF (Kurvengurt Foerderer) Curve Belt Conveyor
- KMF (Kurvengängiges Modulband) Curved Modular Belt Conveyor
- KTF (Kettengurt Foerderer) Chain Conveyor
- MBF (Modulband Foerderer) Modular Belt Conveyor
- RBM (Rollenbahn Motor) Motorized Roller Conveyor
- RBS (Rollerbahn Schwerkraft) Idler Roller Conveyor
- RBT (Rollenbahn Tangentialkette) Drive Roller Conveyor
- SBF (Scharnierband Foerderer) Hinged Belt Conveyor
- SPU (Staufaehiges Pallettenumlaufsystem) Continuous Motion Pallet Conveyor
- SRF (Staurollen Foerderer) Accumulating Roller Conveyor
- TKU (Taktkettenförderer) Timing Chain Conveyor
- ZRF (Zahnriemen Förderer) Timing Belt Conveyor

Technical Documentation

ROLLER CONVEYORS

4 WARRANTY INFORMATION

Warranty

mk North America, Inc. (MKNA) offers a COMPLETE ONE YEAR WARRANTY from the date of delivery, to the original purchaser of the MKNA equipment (CUSTOMER), to be free from defects in material and workmanship; under normal use and with proper installation, maintenance and cleaning.

Additionally MKNA offers a LIMITED 10 YEAR WARRANTY on all equipment that MKNA is the original manufacturer of, to be free from defect and workmanship.¹

This warranty is extended by MKNA only to CUSTOMER, and is non-transferable. All warranty requests shall be made by CUSTOMER.

MKNA will replace or repair, at our factory or any other location we designate², any defective part within the warranty period and without charge. It is at MKNA's sole discretion whether to repair or replace. CUSTOMER will provide MKNA with a prompt written notice of the defect, including the serial number of the unit (when applicable) and the date of delivery.

At MKNA's request CUSTOMER will return all defective parts for evaluation at MKNA. MKNA will provide CUSTOMER with a return goods authorization number (RGA#). No parts will be returned without a RGA#. The RGA# must clearly be marked on all labels, packages and packing slips.

CUSTOMER shall pay all costs for packaging, shipping, duties and/or any other related costs in the sending or receiving of parts. CUSTOMER is responsible for all labor associated with sending or receiving of parts.

MKNA PROVIDES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE; UNLESS IT IS AGREED TO BY MKNA AND CUSTOMER IN WRITING PRIOR TO PLACEMENT OF ORDER. Such agreement requires approval of MKNA Management.

UNDER NO CIRCUMSTANCES SHALL MKNA BE HELD LIABLE FOR DAMAGES OR LIABILITY FOR LOSS OF PRODUCTION, PRODUCT, EQUIPMENT OR PROFITS OR LIABILITY FOR DIRECT, INCIDENTAL, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES TO PERSONS OR PROPERTY, WHATSOEVER. CUSTOMER agrees that it is their sole remedy for liability of any kind, including negligence with respect to the equipment and services furnished by MKNA shall be limited to the remedies provided herein. This warranty shall not apply to any failure of the unit or its components caused by lack of maintenance and/or improper maintenance, incorrect adjustments, misuse or unreasonable use or exposure to chemicals and/or environments which the unit is not designed for. Unauthorized modification of the unit or the use of non-MKNA replacement parts and building components voids this warranty.

¹ The limited 10 year warranty does not apply to equipment and components manufactured by others. Such equipment and components are subject to any limitation contained in the original manufacturer's warranty and include, but are not limited to: bearings, belts, casters, controllers, motors and pneumatic devices.

² No work will be performed by MKNA or an MKNA factory authorized service representative at the site of installation unless in MKNA's opinion it is impractical for Customer to remove and return the defective part to MKNA's factory.

EXCEPT AS EXPRESSLY STATED HEREIN, THERE ARE NO WARRANTIES, EXPRESSED OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE, OF THE EQUIPMENT OR SERVICES FURNISHED BY MKNA OR FACTORY AUTHORIZED SERVICE REPRESENTATIVE. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF.

mk North America, Inc. reserves the right to change, modify or discontinue products and/or specifications with or without notice.


All of mk North America, Inc. products are covered by this warranty.

5 SAFETY REQUIREMENTS

5.1 Warnings - Safety Guidelines

READ AND UNDERSTAND ALL OF THESE WARNINGS PRIOR TO OPERATING EQUIPMENT.

CAUTION




Read this manual before operating conveyors.

CAUTION



Never operate or service equipment under the influence of drugs and/or alcohol.

CAUTION



Lock out power before servicing the conveyor.


WARNING



Do NOT operate conveyors without guards in place.

Severe injury can occur.

IMPORTANT




Conveyors must be installed so that they are square and level – across the belt. Failure to install conveyors correctly may cause premature equipment failure and/or product damage.

WARNING



Do not operate conveyors in an explosive environment.

DANGER



Moving equipment can cause severe injury or death.

Do NOT touch moving parts. Lock out power before servicing.


WARNING



Garmotors will be hot. Do NOT touch.

Severe injury can occur.


DANGER



Climbing, sitting, walking or riding on the conveyor at any time could result in severe injury or death.

KEEP OFF!


DANGER



Always support conveyor sections prior to loosening stands or supports. Loosening stands or supports can cause the conveyor to fall creating a crush hazard.

5 SAFETY REQUIREMENTS (CONT.)

NOTICE



All work should be done by qualified professionals. This includes electricians for all wiring.

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES

6.1	Important Notes About Wear Items & Maintenance	9
6.2	RBS-P 2065 / 2066 / 2255	10
6.3	RBM-P 2255	12
6.4	RBT-P 2255	14

6.1 Important Notes About Wear Items & Maintenance





The following information regarding life of the wear items and service or adjustment intervals of the functional elements are only GUIDELINES. Conveyors are application-specific products whose life expectancy can vary depending on their relative loads and speeds, and which can be significantly influenced by environmental factors.

- All moving components and screw connections should be checked every 6 months.
- All safety-relevant components should be part of a regularly scheduled weekly inspection
- The proper function of these components must be confirmed at all times.
- Do NOT operate conveyors if safety-relevant components are damaged or missing.

Technical Documentation ROLLER CONVEYORS

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.2 RBS-P 2065 / 2066 / 2255

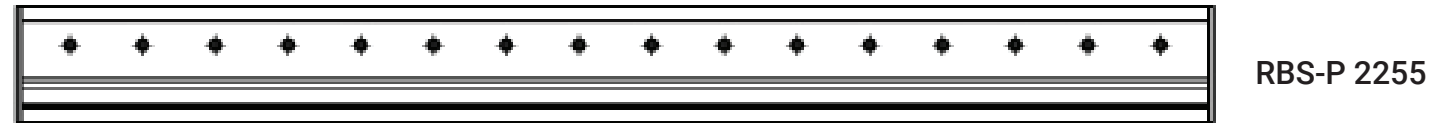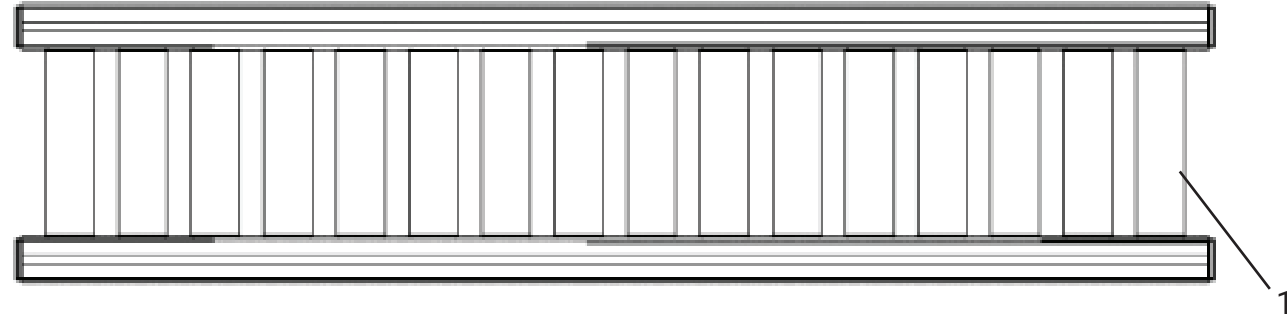

NOTE: Not all items shown in all views for clarity.

(Cont.)

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.2 RBS-P 2065 / 2066 / 2255 (con't)

Maintenance Work for RBS-P 2065 / 2066 / 2255

Position	Description	Action*	Interval in Hours (Months)	Lubricant
1	Roller	I	1,000 Hours (Max. 6 Months)	



* LEGEND: Inspect, Replace, Tension, Clean, Lubricate (grease).

Wear Items for RBS-P 2065 / 2066 / 2255

Position	Description	Part Number
1	Roller	Inquire with mk North America

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.3 RBM-P 2255

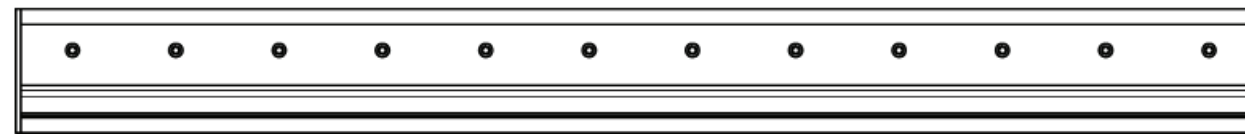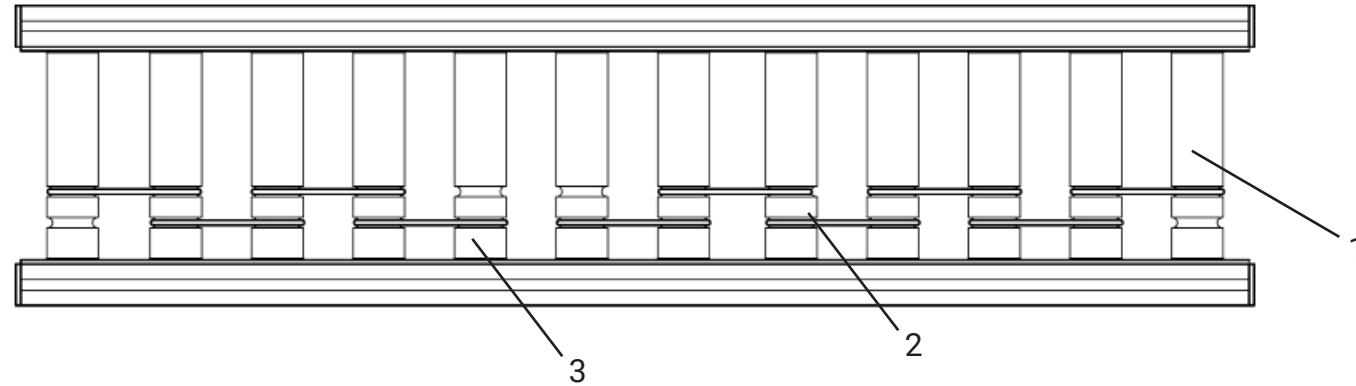

NOTE: Not all items shown in all views for clarity.

(Cont.)

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.3 RBM-P 2255 (cont.)

Maintenance Work for RBM-P 2255

Position	Description	Action*	Interval in Hours (Months)	Lubricant
1	Roller	I	1,000 Hours (Max. 6 Months)	
2	V-Belt	I, R	500 Hours (Max. 3 Months) Replace if wear is present	
3	Motorized Roller	I	Service & Maintenance per manufacturer's documentations	

* LEGEND: Inspect, Replace, Tension, Clean, Lubricate (grease).



Wear Items for RBM-P 2255

Position	Description	Part Number
1	Roller	Inquire with mk North America
2	V-Belt	Inquire with mk North America
3*	Motorized Roller	Inquire with mk North America

* Location and quantity of motorized roller varies based on application. Motorized rollers can be identified via their power cords.

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.4 RBT-P 2255

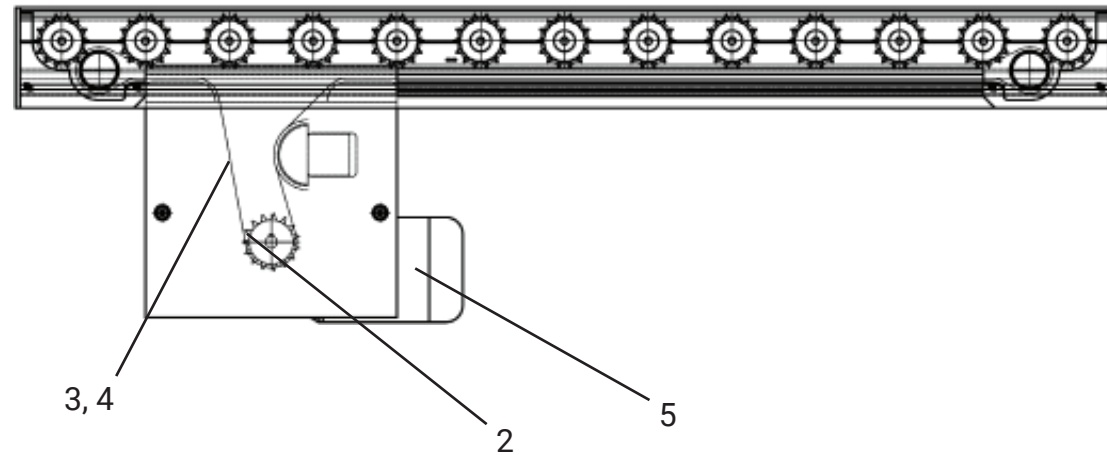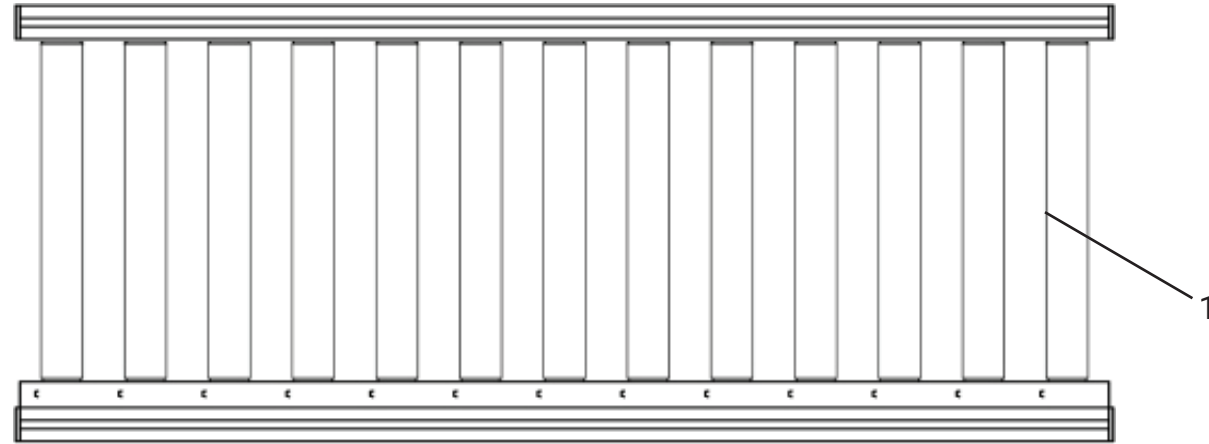

NOTE: Not all items shown in all views for clarity.

(Cont.)

6 WEAR ITEMS & MAINTENANCE BY CONVEYOR TYPES (CONT.)

6.4 RBT-P 2255 (cont.)

Maintenance Work for RBT-P 2255

Position	Description	Action*	Interval in Hours (Months)	Lubricant
1	Roller	I	1,000 Hours (Max. 6 Months)	
2	Sprocket	I, C	1,000 Hours (Max. 6 Months)	SAE20-SAE50
3, 4	Chain & Connecting Link	I, C, L, T R	500 Hours (Max. 3 Months) If indicated as shown in Section 7	SAE20-SAE50
5	Gearmotor	I	Service & Maintenance per manufacturer's documentation	

* LEGEND: Inspect, Replace, Tension, Clean, Lubricate (grease).

Wear Items for RBT-P 2255

Position	Description	Part Number
1	Roller	Inquire with mk North America
2	Motor Sprocket	Inquire with mk North America
3	Chain	Inquire with mk North America
4	Connecting Link	Inquire with mk North America
5	Gearmotor	Inquire with mk North America

NOTE: For adjusting the chain tensioning, please see the related section for details.

7 CONVEYOR MAINTENANCE - GREASING & TENSIONING OF DRIVE CHAIN






All work to be performed by qualified personnel only.
Conveyor power **must** be disconnected before performing maintenance.
THIS SECTION ONLY APPLIES TO RBT-P 2255 CONVEYOR MODEL

7.1 RBT-P 2255

17

7 CONVEYOR MAINTENANCE - TENSIONING ... (CONT.)

7.1 Greasing & Tensioning of the Drive Chain - RBT-P 2255
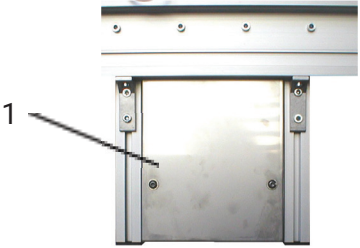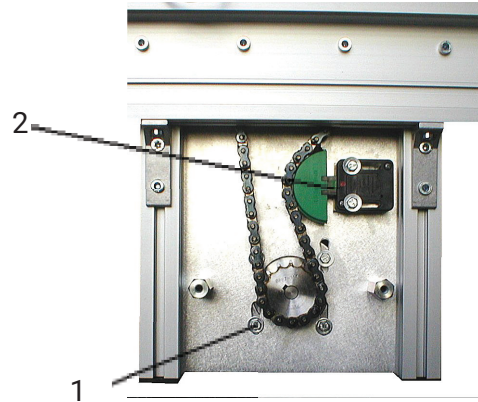
<p>Remove screws (1) and remove the chain guard.</p>	
<p>The drive chain (1) is to be lubricated with lubricant as outlined in Section 6 for RBT-P 2255. Apply the lubricant with a brush to the chain edges, in order for the lubricant to penetrate the links completely.</p> <p>Replace chain guard when done.</p>	
<p>Remove chain guard as described above. Slowly and carefully jog the chain (1) until the connection link is visible. Loosen the screws of the chain tensioner (2) and move it in the arrow direction.</p> <p>Note: Visual Indicator The chain tensioner features a visual indicator to immediately see proper tension.</p> <p>Green: Chain tension is correct. Yellow: Tension is no longer optimal but still adequate. Red: Tension has fallen below the range assuring smooth and safe operation. The chain tensioner must be adjusted. If further adjustments of the tensioner is not possible, the chain should be shortened or replaced. Note that maximum chain stretch shall not exceed 3%.</p> <p>Caution! With the change of the chain there exists a risk of crushing. After maintenance procedures are completed, replace that chain guard.</p>	

*Reassemble in reverse order; ensuring all screws are tight and all guards are in place before operating.

8 CONTACT INFORMATION



sales@mknorthamerica.com
spareparts@mknorthamerica.com
service@mknorthamerica.com



(860) 769-5500

mk North America, Inc.
an mk Technology Group Company
105 Highland Park Drive
Bloomfield, CT 06002, USA
Phone: (860) 769-5500

www.mknorthamerica.com
sales@mknorthamerica.com